



# COAL CARRIERS

BUILT TO CARRY 28 TONNES

SUITABLE FOR DIVERSE CARGO TYPES CAN BE USED FOR DENSE CARGOES TRANSPORTED BY THE MINING AND MINERAL BY-PRODUCT INDUSTRIES

**RIGHT CONTAINER,  
RIGHT PLACE,  
RIGHT TIME**



## FEATURES

- TIPPING HATCH ON FRONT END
- GREATER SIDE WALL STRENGTH TESTED TO 0.6-0.8 TIMES OF PAYLOAD
- SAFETY RELEASE ON HATCH END
- TARPAULIN CAN BE FITTED AND SECURED TO EXTERNAL LASHING POINTS
- SMOOTH STEEL FLOORS AND SIDE PANELS
- SMOOTH AND ANGLED CONNECTIONS BETWEEN INTERNAL FLOOR AND SIDE PANEL
- EASILY STACKED TOGETHER AND STORED ONSITE


## ADVANTAGES

- SAFE AND EFFICIENT DISCHARGE
- SUITABLE FOR DIVERSE CARGO TYPES
- OPERATIONAL FLEXIBILITY
- ADDED SAFETY
- LESS RISK OF INJURY OR DAMAGE
- HELPS TO PREVENT PRODUCT LOSS AND DUST
- CONTAINER IS MORE RESISTANT TO DAMAGE
- SMOOTH DISCHARGE OF PRODUCT
- NO PRODUCT STICK INSIDE THE CONTAINER
- STANDARD CONTAINER STORAGE
- NO NEED FOR SPECIALIST LIFTING EQUIPMENT

## BENEFITS

- SAVES TIME AND THE NEED FOR SPECIALISED LIFTING EQUIPMENT
- IMPROVES OPERATIONAL PROCESSES RESULTING IN REDUCED COSTS
- SAVES TIME AND REDUCES COST
- LESS RISK OF PRODUCT LOSS
- ADDRESSING ENVIRONMENTAL CONCERNS FOR CONTROLLING DUST AND LOOSE PRODUCTS
- DECREASES MAINTENANCE AND REPAIR COSTS
- DECREASES COST OF WASTE
- SAVES COSTS

- END WALL STRENGTH IS GREATER, WITH TEST LOAD OF 0.6 PAYLOAD, COMPARED TO 0.4 FOR A STANDARD ISO CONTAINER

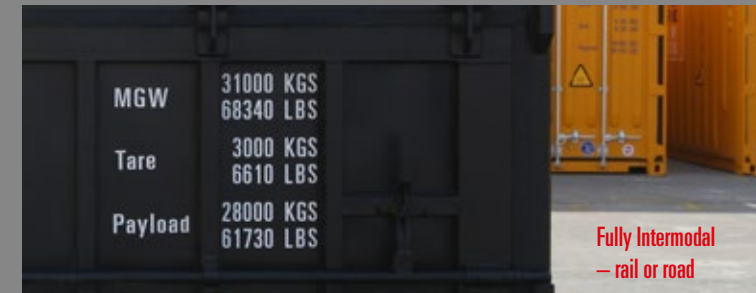

MGW	31000 KGS 68340 LBS
Tare	3000 KGS 6610 LBS
Payload	28000 KGS 61730 LBS

Fully Intermodal  
— rail or road

ANTWERP • BRISBANE • CAPE TOWN • DURBAN • GOTHENBURG • HAMBURG • HOUSTON • LISBON • LONDON • MADRID  
 MIAMI • MOSCOW • MUMBAI • PARIS • PERTH • RIODEJANEIRO • SEOUL • SHANGHAI • SINGAPORE • SYDNEY • TAIPEI • TOKYO



SEACO HAS A DEDICATED GLOBAL TEAM OF SPECIALISTS WHO ARE RESPONSIBLE FOR ONE OF THE LARGEST FLEETS OF SPECIALISED CONTAINERS IN THE WORLD. WITH OUR VAST EXPERIENCE IN THE INDUSTRY, WE WILL ADVISE ON THE RIGHT CONTAINER FOR YOUR CARGO, AND TAILOR A LEASING SOLUTION TO YOUR SPECIFIC REQUIREMENTS.

TECHNICAL SPECIFICATIONS	
Dimensions are nominal and typical – there may be variations	
Maximum Gross Weight	31,000 kg
Tare Weight	3,000 kg
Max Payload	28,000 kg
Discharge Type	Tipping

INTERNAL DIMENSIONS	
Internal Length	5,871 mm
Internal Width	2,276 mm
Internal Height	2,350 mm
Internal Cubic Capacity	31.4 m <sup>3</sup>

EXTERNAL DIMENSIONS	
External Length	6,058 mm
External Width	2,438 mm
External Height	2,591 mm
Discharge Hatch Height	1,300 mm
Discharge Width	2,282 mm
Roof Opening Length	5,752 mm
Roof Opening Width	2,132 mm

FOR DETAILED SPECIFICATIONS OF OUR PRODUCT OFFERING, PLEASE CONTACT YOUR REGIONAL SEACO OFFICE:

**AMERICAS**

(+1) 305 597 2135  
 cs.americas@seacoglobal.com

**AFRICA**

(+27) 2 1702 3631  
 cs.southafrica@seacoglobal.com  
 seacoglobal.co.za

**EUROPE**

(+49) 40 8080 3128  
 cs.emeia@seacoglobal.com

**ASIA**

(+65) 6595 1900  
 cs.asiapacific@seacoglobal.com

**MIDDLE EAST & INDIA**

(+91) 22 6179 0644  
 cs.isc@seacoglobal.com

**OCEANIA**

(+61) 2 9290 1455  
 cs.oceania@seacoglobal.com  
 seacoglobal.com.au



an **HNA** company